

VERATEC

MAXI ROYAL | Maxi Series
MAXI ROYAL 70

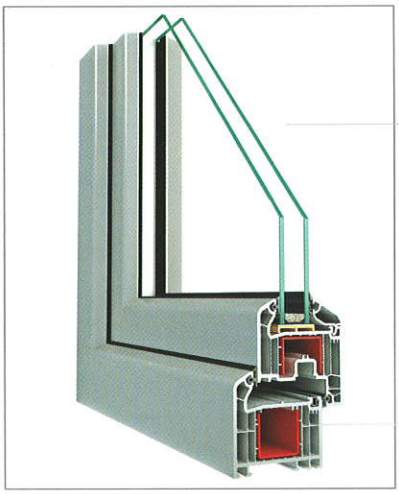

Heat and sound insulation oppurtinity is provided by using qualified glass applications in 4-20-24-28-34 and 40mm.


5 chambered angled outside surface design.

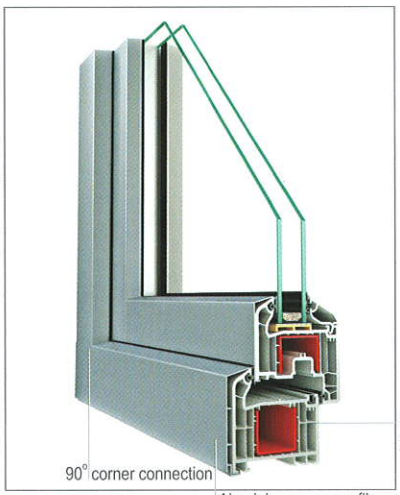

6 chambered aluminium cover design.

90° corner connection

Aluminium cover profile.

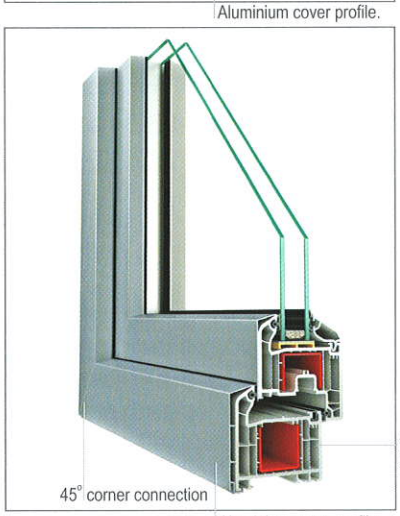



6 chambered aluminium cover design.

45° corner connection

Aluminium cover profile.


Designed for renovation applications from old buildings and new constructions, high rise residential and commercial buildings; with sufficient insulation and statical resistance features and different color possibilities.

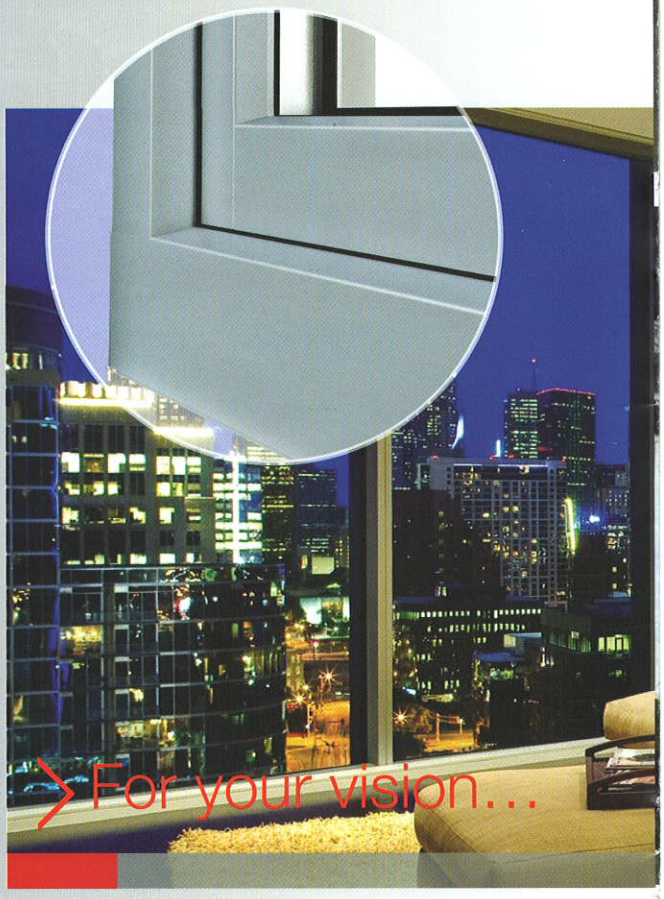

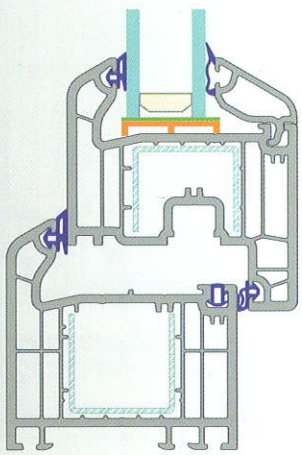






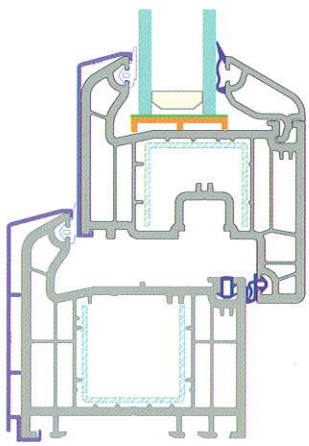

- Provides heat and sound insulation oppurtinity by using qualified glass in 4-20-24-28-34 and 40mm
- With an additional chamber and air wall; contributes better value to the window insulation.
- Provides better aesthetical design with aluminium cover application.
- Special design to provide better insulation along with PVC profile.
- Application profile with special design offers endless color options for external facade applications from residential and commercial buildings.



HEAT ISOLATION CHARACTERISTIC


THERMAL CAMERA



UNLEADED